


DO NOT SCALE
DIMENSIONS IN mm




METRIC

THIRD ANGLE
PROJECTION



NOTES:

- ① CONNECTOR IS DESIGNED FOR FLAT RIBBON CABLE ON 1,27 CENTERS. FOR CABLE REQUIREMENTS SEE APPLICATION SPECIFICATION 114-19022.
- ② INDICATION OF FIRST CABLE POSITION REFERRING TO CORRESPONDING CONTACT POSITION (BLACK INK MARKS)
- ③ SOLDER-TINES FOR $0,8^{+0,1}$ DIA. HOLES.
- ④ PRODUCT SPECIFICATION 108-19033
- ⑤ OBSOLETE

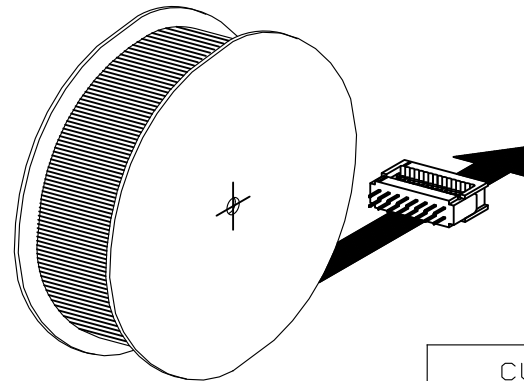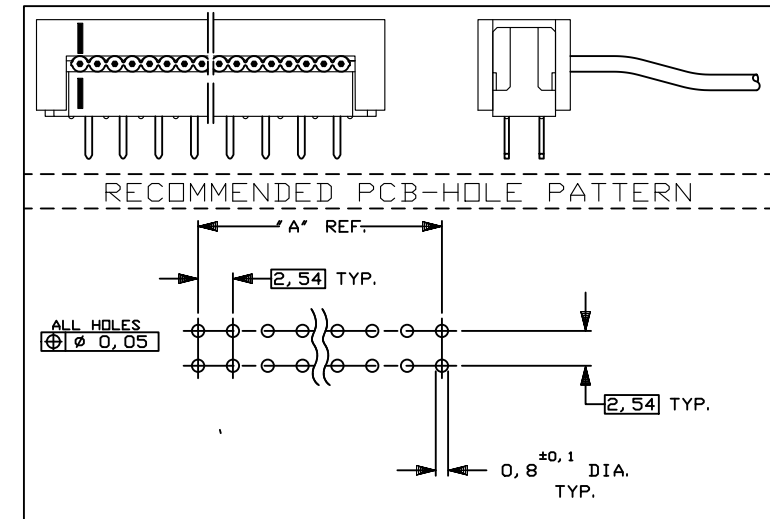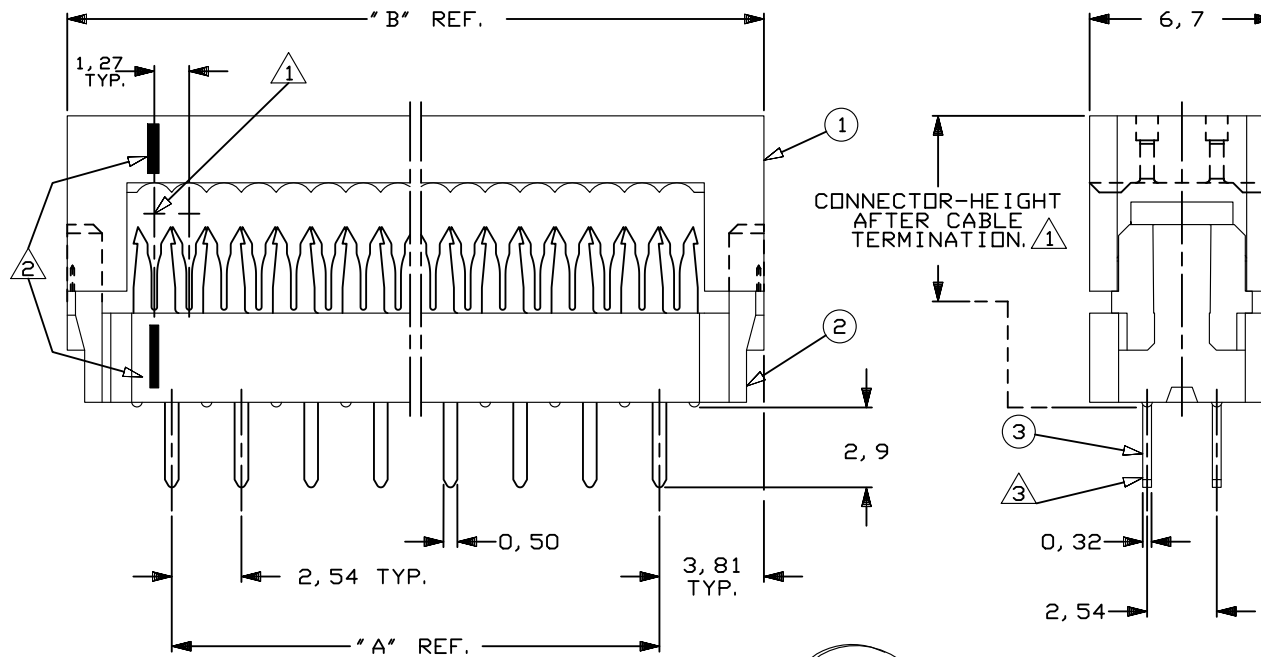

6-216119-4	A	64	78,74	86,36	1000
6-216119-0	A	60	73,66	81,28	1000
5-216119-0	A	50	60,96	68,58	1000
4-216119-4	A	44	53,34	60,96	1500
4-216119-0	A	40	48,26	55,88	1500
3-216119-4	A	34	40,64	48,26	1500
2-216119-6	A	26	30,48	38,10	1500
2-216119-0	A	20	22,86	30,48	1500
1-216119-6	A	16	17,78	25,40	1500
1-216119-4	A	14	15,24	22,86	1500
1-216119-0	A	10	10,16	17,78	1500
216119-6	A	6	5,08	12,70	1500

PARTNUMBER	PART REV.	NR. OF POS.	DIM. "A" REF.	DIM. "B" REF.	QUANTITY PER REEL
------------	-----------	-------------	---------------	---------------	-------------------

REVISION RECORD				
LTR.	REVISION	DR.	CHK.	DATE
B	REVISED PER ECN-25-325980	MS	JM	09JUN2025
A2	REVISED PER ET00-0243-04	A. V.	R. M.	21MAR2005
A1	REVISED PER ET00-0023-04	D. C.	C. T.	09FEB2004
A	-	-	-	22MAY1989

CUSTOMER
DRAWING

FOR REFERENCE ONLY
WILL NOT BE UPDATED

DR.	DATE
W. R. VERBEET.	7-10' 88
CHK.	DATE
R. VERSTIJNEN.	10-10' 88
APP.	DATE
L. v. SOEST.	10-10' 88

③ CONTACTS	PHOSPHORBRONZE	3,0-5,1 μ m TIN WITH ENTIRE NICKEL UNDERCOATING
② HOUSING AND COVER	THERMOPLASTIC POLYESTER	GREY
① HOUSING		
COMPONENT NAME	MATERIAL	PLATING / COLOUR



TE Connectivity

~~THIS DRAWING IS UNPUBLISHED~~ RELEASED FOR PUBLICATION 7-10, 1988

© COPYRIGHT 1988 BY AMP-HOLLAND B. V.
ALL INTERNATIONAL RIGHTS RESERVED.
AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

WIRE RANGE	NAME
SEE NOTE ①	AMP-LATCH
INSUL. RANGE	2,54 DIL-PLUG CONNECTOR
SEE NOTE ①	WITHOUT RETENTION LEGS
	TAPE-MOUNTED ON REEL.
SIZE	SHEET
A3	1 OF 1
DWG. No.	C-216119
REV. LTR.	B