ROHS COMPLIANT

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 44390	11/19	DEF

PRODUCT DATA DRAWING

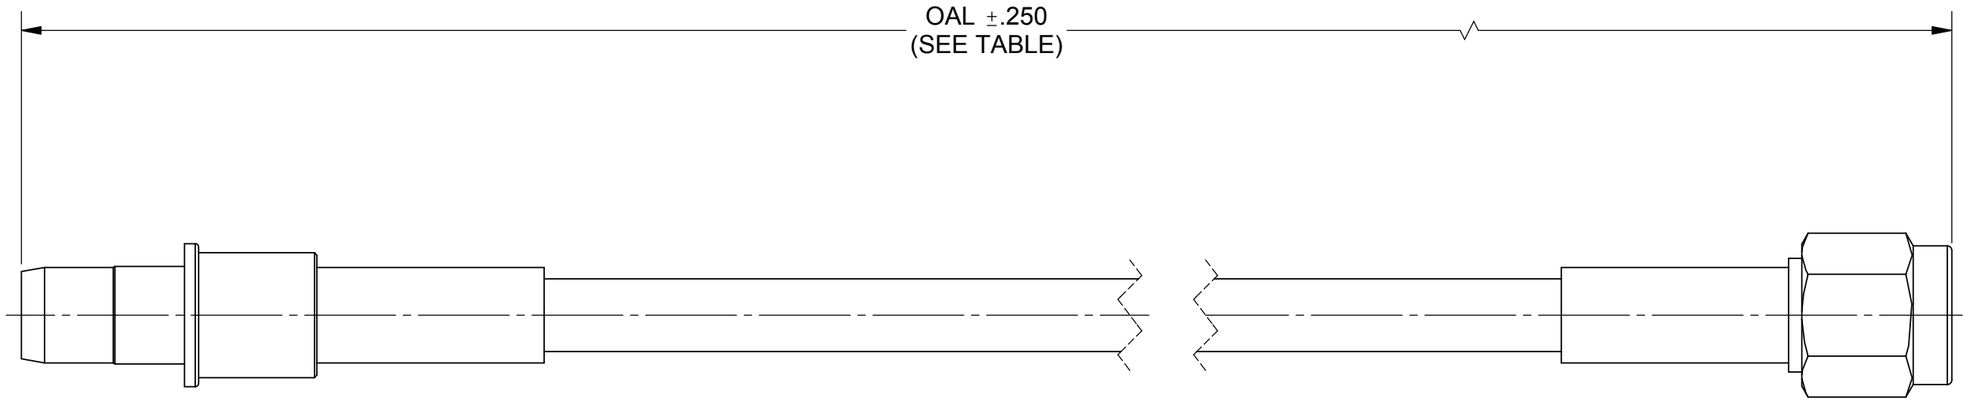

MATERIAL:

CONNECTORS: BMA (SIZE 8) D38999 PIN CONTACT (SF9421-6001)
SMA PLUG (SF2902-6005)

CABLE: T-FLEX 402

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 18.0 GHz

SV P/N	OAL
7093-0184	12.000
7093-0185	24.000

MATERIAL: SEE NOTES
FINISH: SEE NOTES
SURFACE AREA: N/A

PROPRIETARY
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES:
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15'
DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED
1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING.
3) BREAK CORNERS & EDGES .005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63 . MIL-STD-10.
6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R.
7) REMOVE ALL BURRS

DRAWN:	SJ 11/11/19
CHECKED:	DEF 11/11/19
APPROVED:	DEF 11/11/19

Amphenol SV MICROWAVE
www.svmicrowave.com

TITLE: BMA (SIZE 8) D38999 PIN CONTACT TO SMA MALE FOR Ø.141 T-FLEX 402 CABLE ASSEMBLY

SIZE B | DWG. NO. 7093-0184-0185

SCALE: 3:1 | SHEET 1 OF 1