
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
AF	50

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D2	REVISED PER ECR–19–013909	30SEP2019	PC	MB

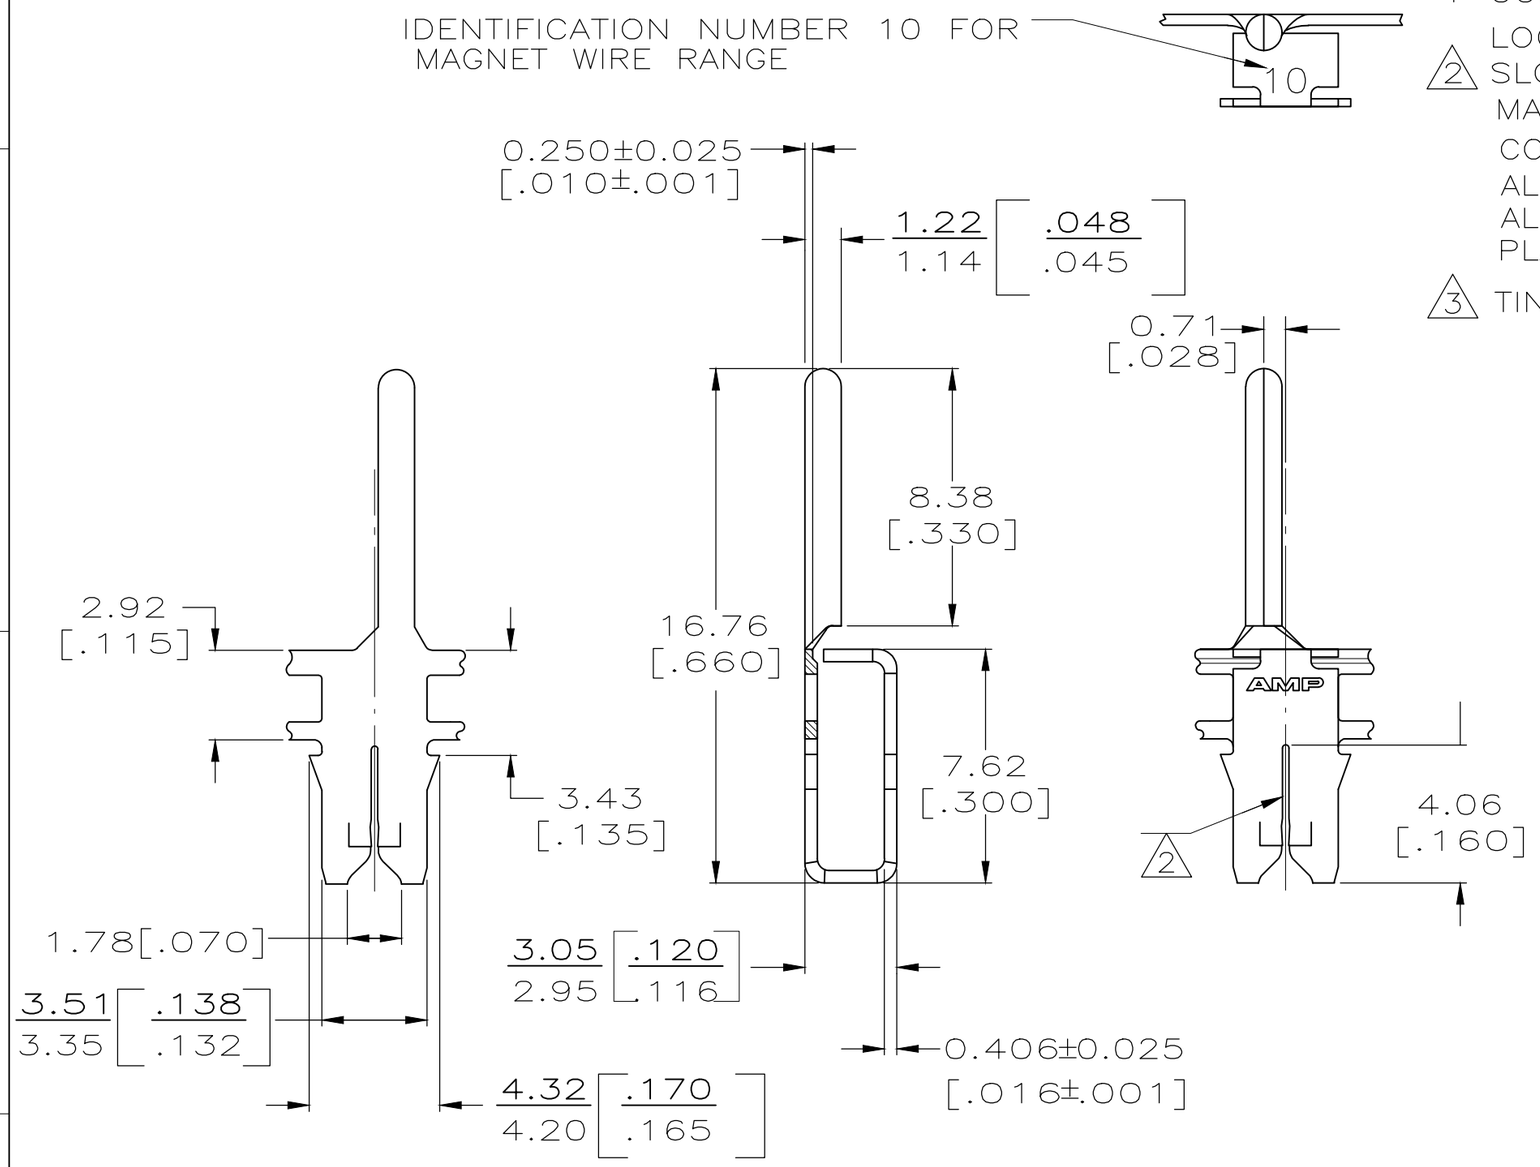

1 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 5.59 [.220] CENTERS.

△2 SLOT TERMINATES EITHER SINGLE OR DOUBLE MAGNET WIRES OF THE SAME TYPE AND SIZE, COPPER RANGE IS 0.36–0.57mm [#27–#23 AWG]. ALUMINIUM RANGE IS 0.51–0.64mm [#24–#22] AWG. ALUMINIUM WIRE RANGE APPLIES FOR POST TIN PLATED PART NUMBERS ONLY.

△3 TIN PLATE PER MIL–T–10727

63570–1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± 0.15[.006]
3 PLC	± –
4 PLC	± –
ANGLES	± –

MATERIAL: BRASS

FINISH: △3

DWN	D.K. SCHRUM 2/1/90
CHK	M.S. FEHER 2/2/90
APVD	D.F. DECKER 2/2/90
PRODUCT SPEC	108–2012
APPLICATION SPEC	114–2046
WEIGHT	–

TE Connectivity

NAME: PIN, 1.22[.048] DIA, LEFT HAND, MAG–MATE ™ –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–63570	–

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV D2