

© 2024 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E2	REVISED PER ECR-24-216887	06AUG2024	GH	AK

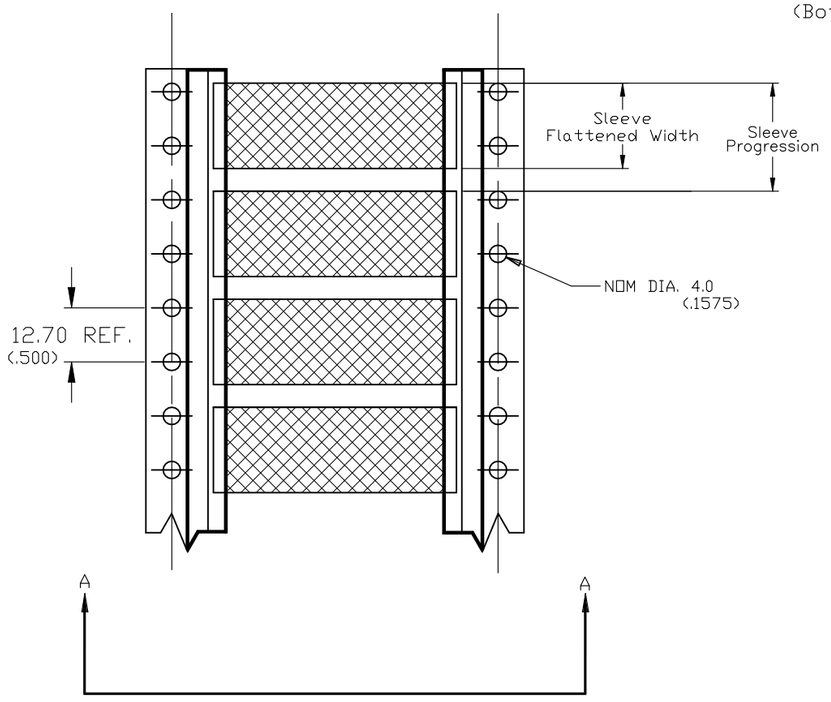


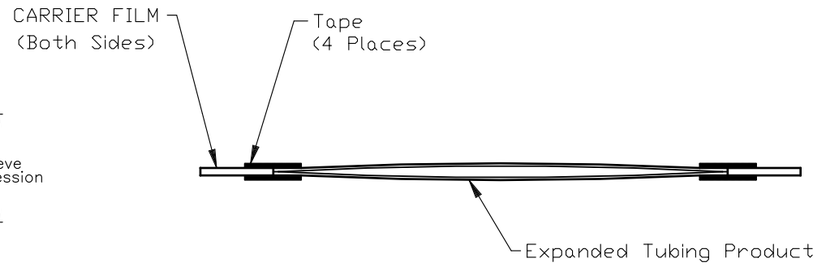


SECTION A - A

Product Size	22-18	18-12	16-10	8-4	10-2	6-250	1-400	400-1000
Minimum Sleeve Flattened Width	5.84 (.230)	8.00 (.315)	10.7 (.420)	15.5 (.610)	20.4 (.803)	30.5 (1.200)	40.4 (1.590)	60.3 (2.37)
Nominal Sleeve Progression	12.70 (.500)	12.70 (.500)	16.94 (.667)	25.40 (1.000)	29.64 (1.167)	42.34 (1.667)	50.80 (2.00)	71.96 (2.83)
"D" Minimum Supplied I.D.	3.18 (.125)	4.75 (.187)	6.35 (.250)	9.53 (.375)	12.70 (.500)	19.05 (.750)	25.40 (1.00)	38.10 (1.50)
"d" Maximum Recovered I.D.	1.07 (.042)	1.57 (.062)	2.11 (.083)	3.18 (.125)	4.22 (.166)	6.35 (.250)	8.46 (.333)	19.05 (.750)
"w" Recovered wall ±0.08 (.003)	0.58 (.023)	0.58 (.023)	0.58 (.023)	0.61 (.024)	0.61 (.024)	0.61 (.024)	0.64 (.025)	0.51 (.020)


DIMENSIONS IN mm (inches)

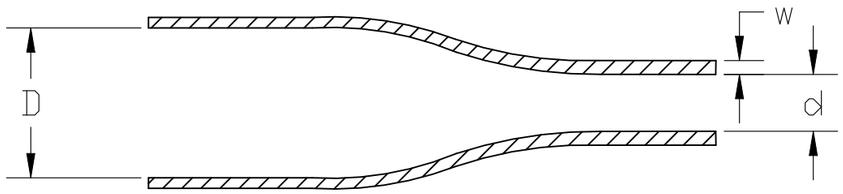


SCORING OPTIONS




SIDE SCORE



S1



S2



S3

NOTE:
1. SIDE SCORE ALSO AVAILABLE WITH S1, S2, & S3

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: CROSS-LINKED POLYOLEFIN

FINISH: –

DWN AFK 31JAN2020
CHK – –
APVD LS 04FEB2020
PRODUCT SPEC RW-2510
APPLICATION SPEC –
WEIGHT VARIOUS

TE Connectivity

NAME RPS – –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	0198G	C-MCD160003	–

CUSTOMER DRAWING | SCALE – | SHEET 1 OF 1 | REV E2

1470-19 (1/15)