


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	20JUL2017	C.W	I.Y
	A1	ECN-24-284298	11SEP2024	K.L	Z.Z

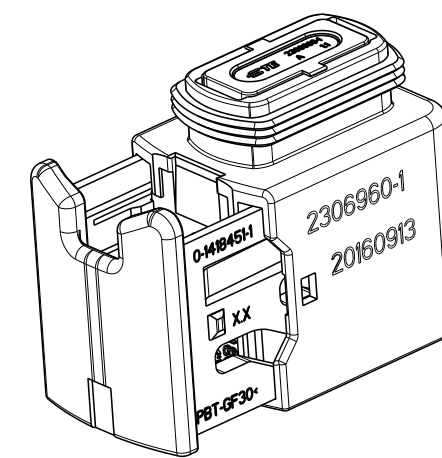

1 TE LOGO

2 LASER MARKING ASSY PN, PRODUCTION DATE (CALENDAR DAY/YEAR): OPTIONAL

 CAVITY NUMBERING

5 CAVITIES MATED WITH AMP MCP 1.5k
SEE PRODUCT GROUP DRAWING
TE NO: 1241436



6 IN CASE OF IPX9K WATERPROOF GRADE APPLICATION. REFER TO DRAWING: 1670150, 1670365 FOR SUITABLE PROTECTIVE COVER.

7 FITS TO TE INTERFACE DRAWING 114-18743-1

8 SUITABLE COUNTERPART SEE DRAWING: 1670730, 1703843, 2278730

9 DELIVERY CONDITION: SECONDARY LOCKING IN LOCK POSITION AND SLIDE IN
PRE-LOCKED POSITION

10 RESISTOR CHARACTERISTICS: 120 OHMS $\pm$ 10%, AT 70°C, 0.4WATTS MIN.

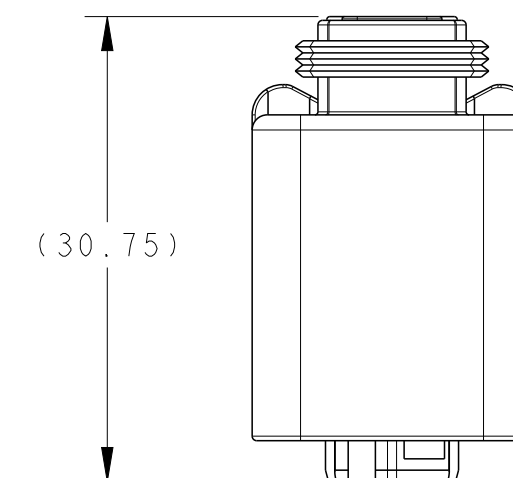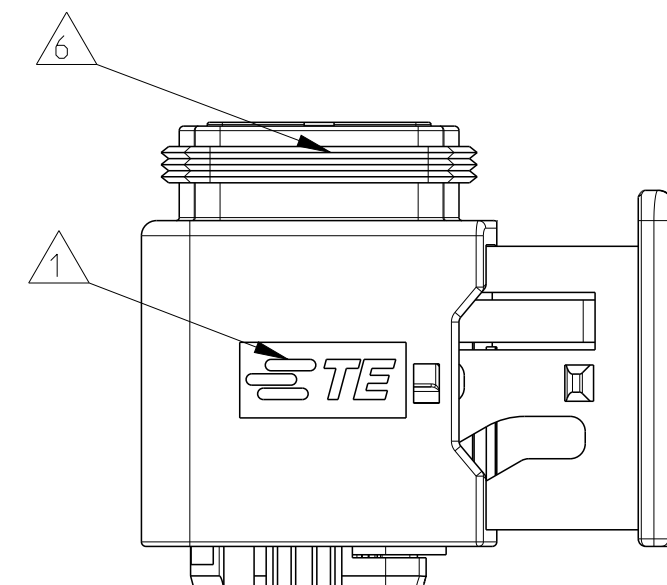

1	WHITE	SILICONE	CAVITY BLOCK CAP	8
1	-	-	120 ohm RESISTOR	7
2	-	Cu ALLOY	CONTACT	6
1	WHITE	PBT-GF30	3POS CAVITY BLOCK	5
1	YELLOW	PBT-GF30	3POS. SEC. LOCK	4
1	WHITE	SILICONE	2-3POS. SEAL	3
1	YELLOW	PBT-GF30	2-3POS. U-SLIDE	2
1	BLACK	PBT-GF30	2-3POS. REC. HSG	1
Q'TY	COLOUR	MATERIAL	DESCRIPTION	ITEM NO
2306960-1	PART NUMBER OF ASS'Y			
A	PRODUCT VERSION			
11.80	WEIGHT OF ASS'Y PART			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. WAN	09OCT2017		 TE Connectivity						
DIMENSIONS:		CHK F. JIANG	09OCT2017		NAME HDCS WITH 120ohms RESISTOR						
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD L. YIN	09OCT2017								
	0 PLC ±.	PRODUCT SPEC	-								
	1 PLC ±0.5	APPLICATION SPEC	-								
	2 PLC ±0.25	-		-							
MATERIAL -	3 PLC ±.	FINISH -	WEIGHT	11.8g		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
	4 PLC ±.		A200779		C-2306960		-				
CUSTOMER DRAWING		SCALE		2:1		SHEET		1 of 1		REV	A1

