

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECO–17–002173	09MAR2017	SY	SY


TE PN	OLD NUMBER
2–1392009–5	V42254–B7291–C498



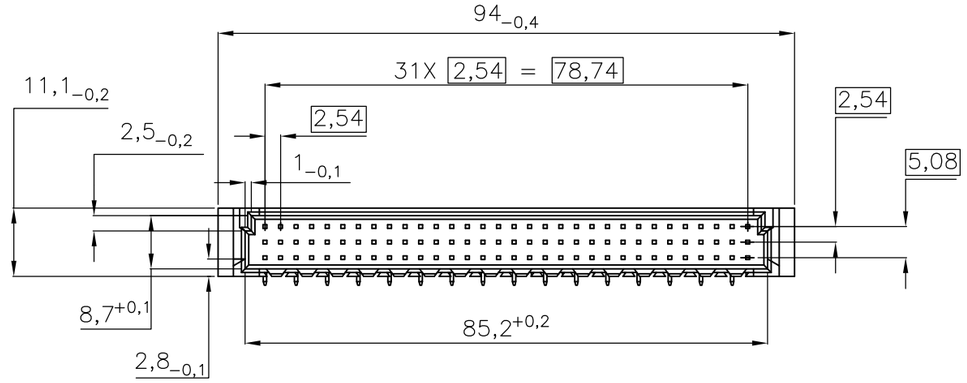

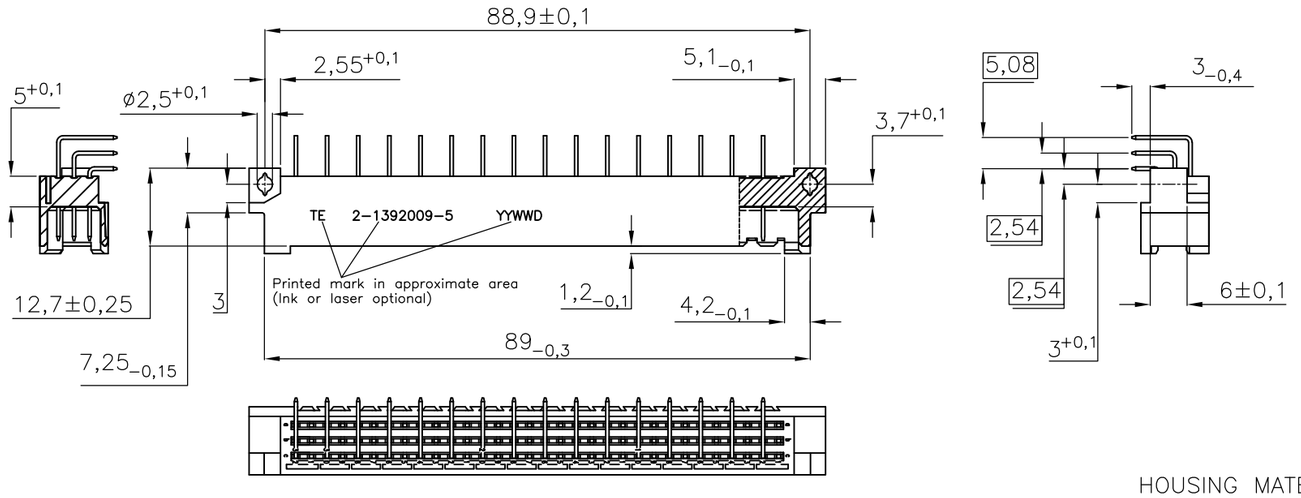

CONTACT LENGTHS (5:1)

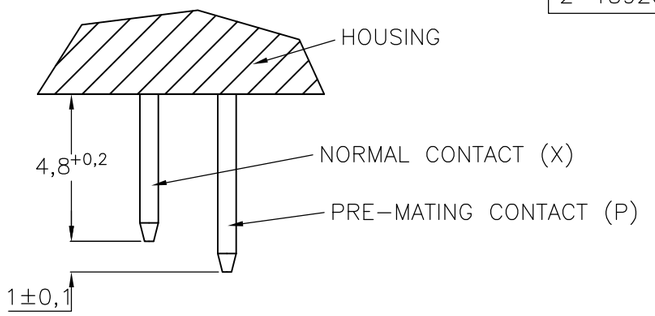

ACTIVE PART NUMBERS. CONTACT TYCO ELECTRONICS FOR OTHER CONFIGURATION AVAILABILITY

CONTACT ASSIGNMENT (48 PINS)


```
                                1                   2                   3
      1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2
ROW A: O P O X O X O X O X O X O X O X O X O X O X O X O X O X O X O X O X O X O X O X
   B: O X O X O X O X O X O X O X O X O X O X O X O X O X O X O X O X O X O X O X O X
   C: O X O X O X O X O X O P O X O X O X O X O X O X O X O X O X O X O X O X O X O X
```

O = NO CONTACT
X = CONTACT
P = PRE–MATING CONTACT

ALL DIMENSIONS ARE IN MM

HOUSING MATERIAL: PBT 30% GLASSFILLED (UL94V–0), GREY
CONTACT MATERIAL: COPPER ALLOY
PLATING : – CONTACT AREA: Pd+Au OR Au
PERF. LEVEL 2 ACC. IEC 603–2
– TERMINATION: Sn

MOUNTING HOLES IN PCB

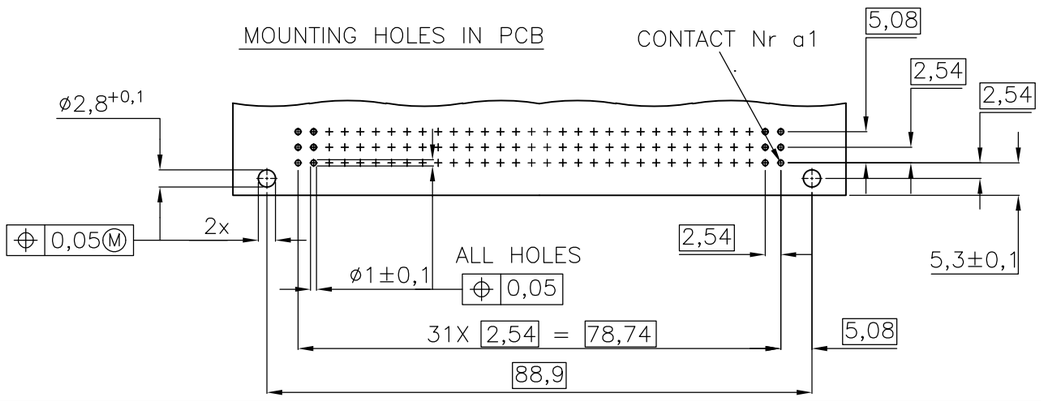

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± –
	1 PLC ± –
	2 PLC ± –
	3 PLC ± –
	4 PLC ± –
	ANGLES ± –
MATERIAL –	FINISH –

DWN	GNANI JADAV A E	12MAR09
CHK	M.KOMAR	17MAR09
APVD	M.WESTEN	17MAR09
PRODUCT SPEC	–	
APPLICATION SPEC	–	
WEIGHT	0.000000	

TE Connectivity

NAME
EUROCARD PIN ASSEMBLY
TYPE C WITH CODING AND PRECENTERING
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2–1392009–5	–

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV C