

© 2008 TE Connectivity. All Rights Reserved.


REVISIONS 変更					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C1	ECN-21-114380:ADD MATED CONDITION	31AUG2021	A.L	H.L

リール引出し方向
DIRECTION OFF TOP OF REEL

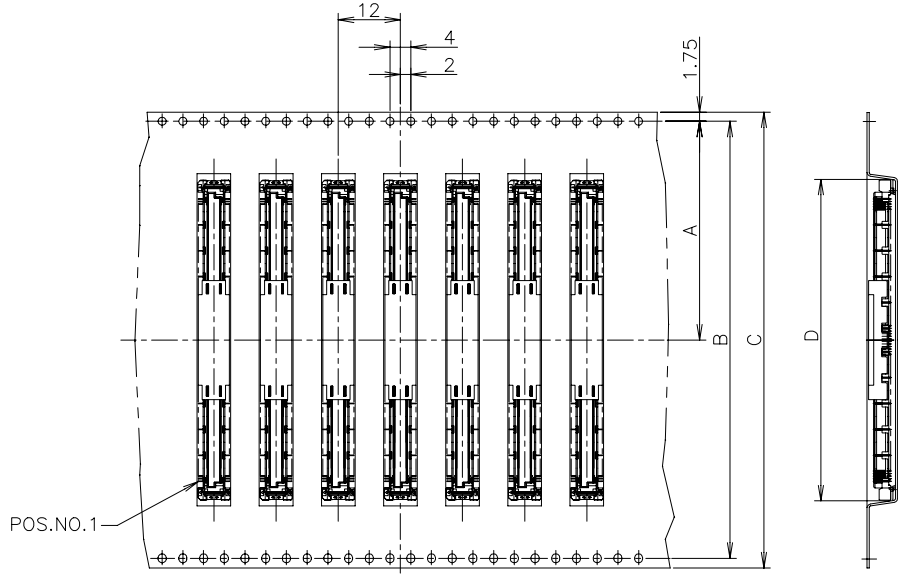


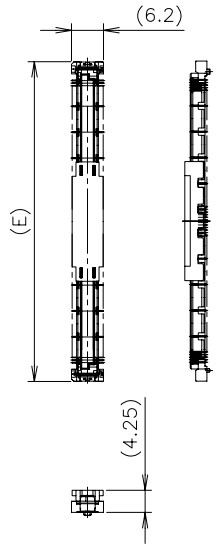


CONNECTOR DETAIL

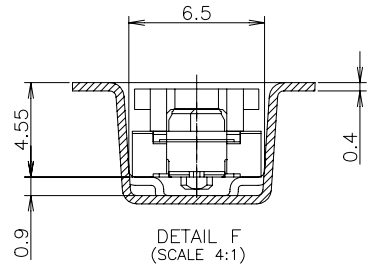

DETAIL F
(SCALE 4:1)



SEE DETAIL F

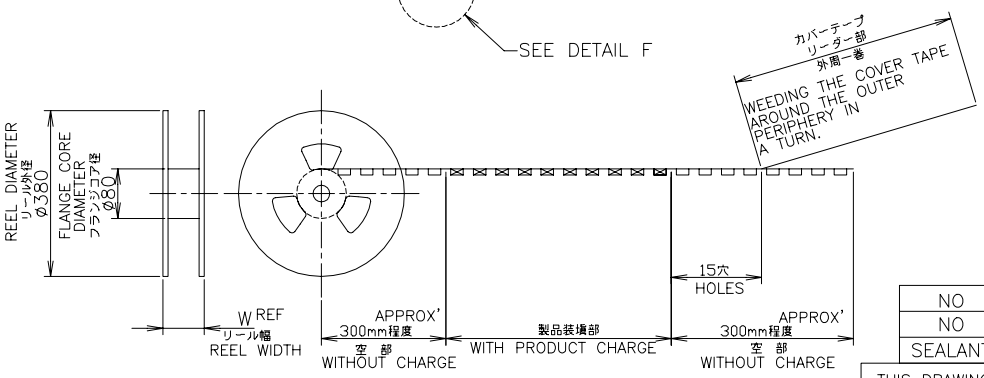

NO	950	59.5	57.7	57.1	54.5	95	61.8	62.1	88	84.4	42.25	220	BLACK	4 3-2040714-7
NO	950	59.5	57.7	57.1	54.5	95	61.8	62.1	88	84.4	42.25	220	BLACK	2 3-2040714-6
SEALANT	QTY	T	S	P	N	W	E	D	C	B	A	POS.	HSG COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位：耗 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差

0 PLC	± 0.3
1 PLC	± 0.3
2 PLC	± 0.3
3 PLC	± 0.3
4 PLC	± 0.3
ANGLES	± 3°

MATERIAL 材料

FINISH 仕上

DWN Y.NAKAZAWA 12MAR2008
CHK T.FUTATSUGI 12MAR2008
APVD T.FUTATSUGI 12MAR2008
PRODUCT SPEC 製品規格 108-5560
APPLICATION SPEC 取付適用規格
WEIGHT .

TE Connectivity Ltd.


NAME 名称
A
FH 0.5BTB CONNECTOR 220 POS
REC 4H WITH G-CONT. AND CAP


SIZE A3 | CAGE CODE 00779 | DRAWING NO 番号 C-2040714 | RESTRICTED TO —


CUSTOMER DRAWING | SCALE 尺度 1:1 | SHEET 1 OF 3 | REV C1

© 2008 TE Connectivity. All Rights Reserved.


REVISIONS 変更					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

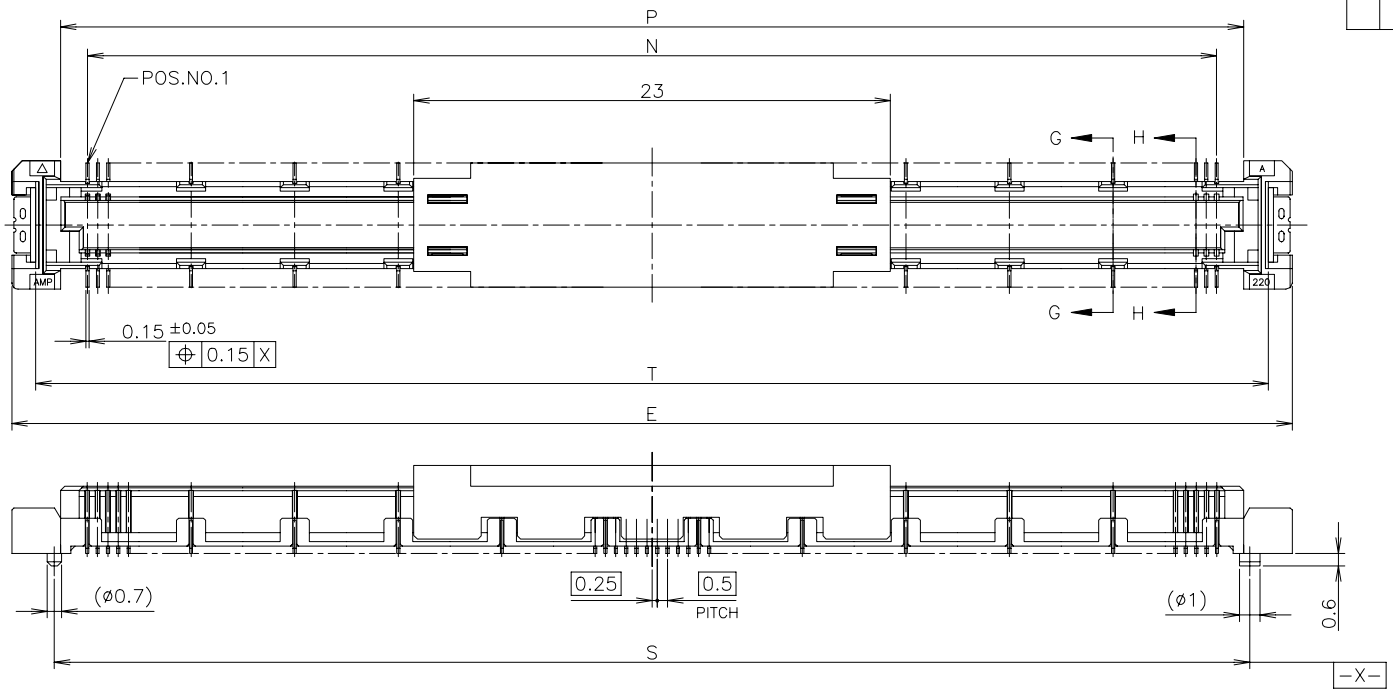




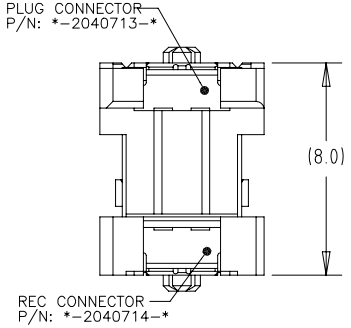

C1 FULL–MATED CONDITION

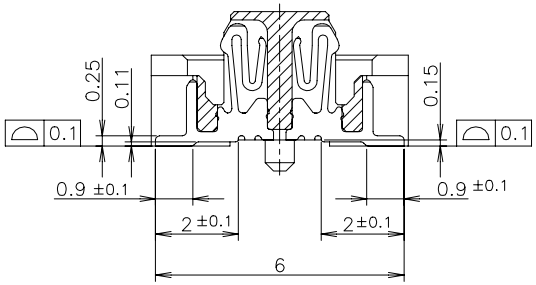

G–G
(GROUND POSITION)
(SCALE 8:1)

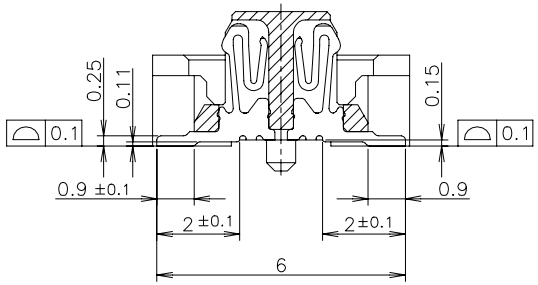

H–H
(SIGNAL POSITION)
(SCALE 8:1)

1. MATERIAL; HOUSING: HIGH TEMP THERMO PLASTIC UL94V–0
   CONTACT: COPPER ALLOY
   SOLDER PEG: COPPER ALLOY
2. FINISH ; SIGNAL CONTACT: UNDER PL Ni 0.0013mm MIN ALL OVER.
   CONTACT AREA 0.00076mm MIN Au PL.
   SOLDERING AREA 0.00005mm MIN Au PL.
   GROUND CONTACT: UNDER PL Ni 0.0013mm MIN ALL OVER.
   CONTACT AREA 0.00076mm MIN Au PL.
   SOLDERING AREA 0.00005mm MIN Au PL.
   SOLDER PEG: 0.001mm MIN TIN PL. OVER
   0.0013mm MIN Ni PL ALL OVER.
3. THIS POSITION IS GROUND CIRCUIT.
4. FINISH ; SIGNAL CONTACT: UNDER PL Ni 0.0013mm MIN ALL OVER.
   CONTACT AREA 0.0002mm MIN Au PL.
   SOLDERING AREA 0.00005mm MIN Au PL.
   GROUND CONTACT: UNDER PL Ni 0.0013mm MIN ALL OVER.
   CONTACT AREA 0.0002mm MIN Au PL.
   SOLDERING AREA 0.00005mm MIN Au PL.
   SOLDER PEG: 0.001mm MIN TIN PL. OVER
   0.0013mm MIN Ni PL ALL OVER.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位：耗 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差

0 PLC	± 0.3
1 PLC	± 0.3
2 PLC	± 0.3
3 PLC	± 0.3
4 PLC	± 0.3
ANGLES	± 3°

MATERIAL 材料: 1

FINISH 仕上: 2 4

DWN | CHK | APVD | PRODUCT SPEC 製品規格 | APPLICATION SPEC 取付適用規格 | WEIGHT

CUSTOMER DRAWING

TE Connectivity Ltd.


NAME 名称: EMBOSS ASSY
FH 0.5BTB CONNECTOR 220 POS
REC 4H WITH G–CONT. AND CAP

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A3	00779	C–2040714	—

SCALE 尺度 4:1 | SHEET 2 OF 3 | REV C1

© 2008 TE Connectivity. All Rights Reserved.

REVISIONS 変更					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

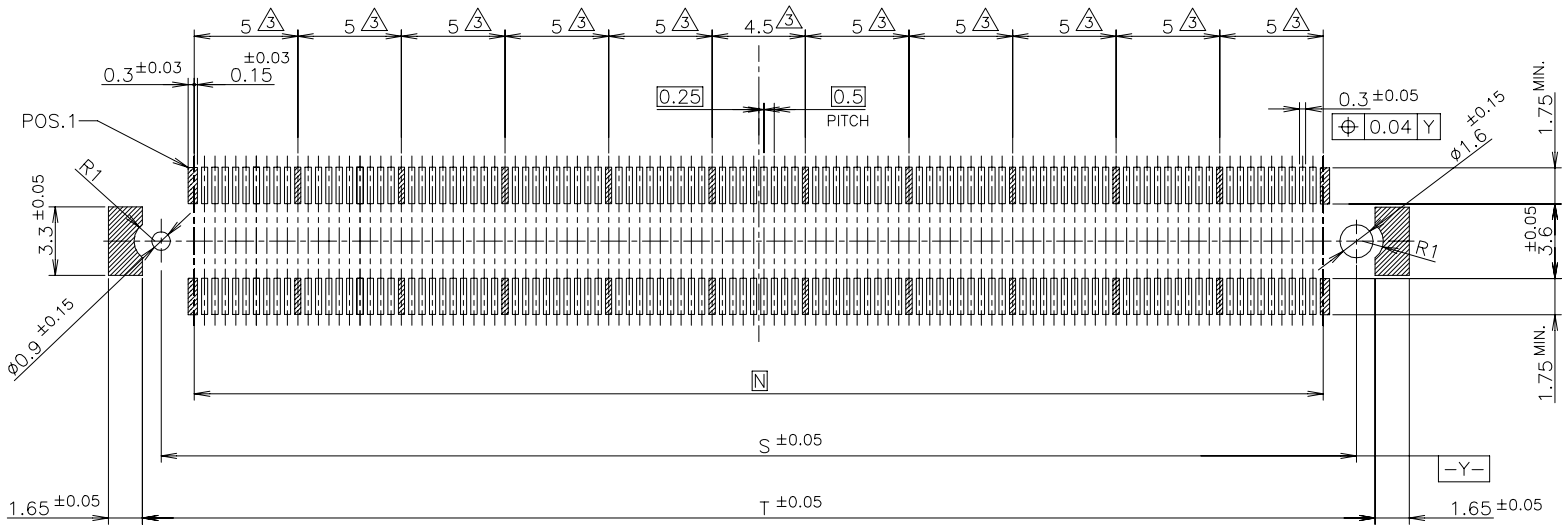

REFERENCE P.C. BOARD LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位： 耗 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差

0 PLC	± 0.3
1 PLC	± 0.3
2 PLC	± 0.3
3 PLC	± 0.3
4 PLC	± 0.3
ANGLES	± 3°

MATERIAL 材料

FINISH 仕上

DWN

CHK

APVD

PRODUCT SPEC 製品規格

APPLICATION SPEC 取付適用規格

WEIGHT

CUSTOMER DRAWING

TE Connectivity Ltd.

NAME 名称: EMBOSS ASSY
FH 0.5BTB CONNECTOR 220 POS
REC 4H WITH G–CONT. AND CAP

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A3	00779	C–2040714	—

SCALE 尺度 4:1 | SHEET 3 OF 3 | REV C1