

© 2024 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F2	REVISED PER ECR-24-215587	25JUL24	GH	AK

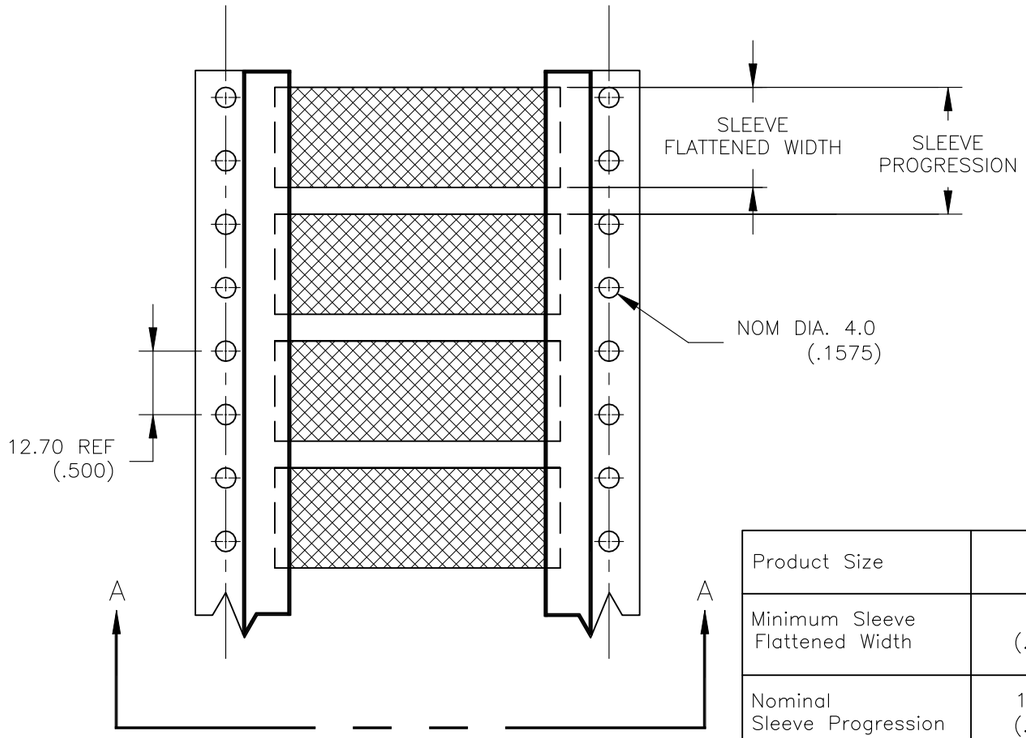

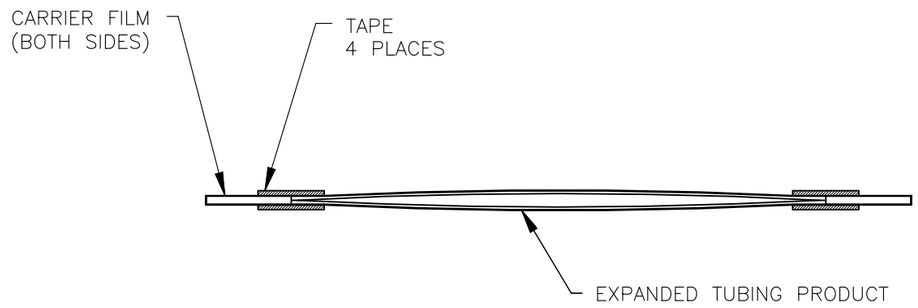


SECTION A–A


Product Size	2.4	3.2	4.8	6.4	9.5	12.7	19.0	25.4	38.1
Minimum Sleeve Flattened Width	4.3 (.169)	6.5 (.256)	8.9 (.350)	11.0 (.433)	15.7 (.618)	20.7 (.815)	30.7 (1.209)	41.1 (1.618)	61.0 (2.402)
Nominal Sleeve Progression	12.70 (.500)	12.70 (.500)	12.70 (.500)	16.94 (.667)	25.40 (1.000)	29.64 (1.167)	42.34 (1.667)	50.80 (2.00)	72.0 (2.835)
"D" Minimum Supplied I.D.	2.40 (.094)	3.20 (.125)	4.80 (.189)	6.40 (.250)	9.50 (.375)	12.7 (.500)	19.0 (.750)	25.4 (1.00)	38.1 (1.50)
"d" Maximum Recovered I.D.	1.19 (.047)	1.60 (.063)	2.40 (.094)	3.20 (.126)	4.80 (.189)	6.40 (.250)	9.50 (.375)	12.7 (.500)	19.1 (.750)
"W" Recovered wall	0.50±0.10 (.020±.004)	0.50±0.10 (.020±.004)	0.51±0.11 (.020±.004)	0.65±0.15 (.026±.006)	0.65±0.15 (.026±.006)	0.65±0.15 (.026±.006)	0.75±0.15 (.030±.006)	0.90±0.15 (.035±.006)	1.00±0.20 (.039±.008)

DIMENSIONS IN MM (INCHES)


SCORING OPTIONS




SIDE SCORE



S1




S2



S3

NOTE:
1. SIDE SCORE ALSO AVAILABLE WITH S1, S2, & S3

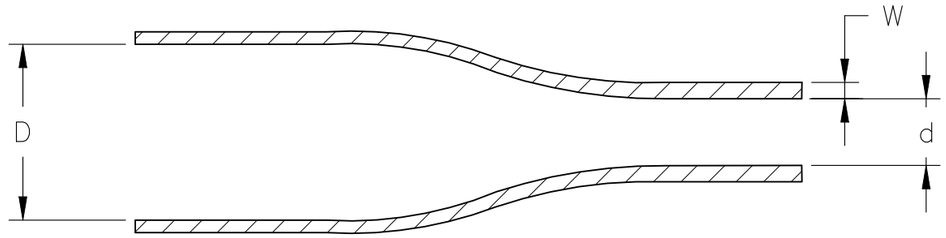

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: CROSSLIMKED POLYOLEFIN

FINISH: –

DWN	Alan Kean	12FEB2020
CHK	Alan Kean	12FEB2020
APVD	Alan Kean	12FEB2020
PRODUCT SPEC	RW-2072	
APPLICATION SPEC	411-121008	
WEIGHT	VARIOUS	

TE Connectivity

NAME: HX-SCE – –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	0198G	C-MCD190000	–

CUSTOMER DRAWING

SCALE	SHEET	REV
NTS	1 OF 1	F2