


## Common Mode Choke

TCK-067


|                           |                                                                                              |
|---------------------------|----------------------------------------------------------------------------------------------|
| Order Code                | TCK-067                                                                                      |
| Inductance (each winding) | 620 $\mu$ H $\pm$ 35% (at 100 kHz / 100 mV)                                                  |
| Impedance (DCR)           | 25 m $\Omega$ max.                                                                           |
| Rated Current             | 7.5 A max.                                                                                   |
| Rated Voltage             | 500 VDC max. (between windings)                                                              |
| Operating Temperature     | -40°C to +105°C                                                                              |
| RoHS Exemptions           | No Exemptions                                                                                |
| Overview Link             | <a href="http://www.tracopower.com/overview/tck-067">www.tracopower.com/overview/tck-067</a> |



### Impedance Curve

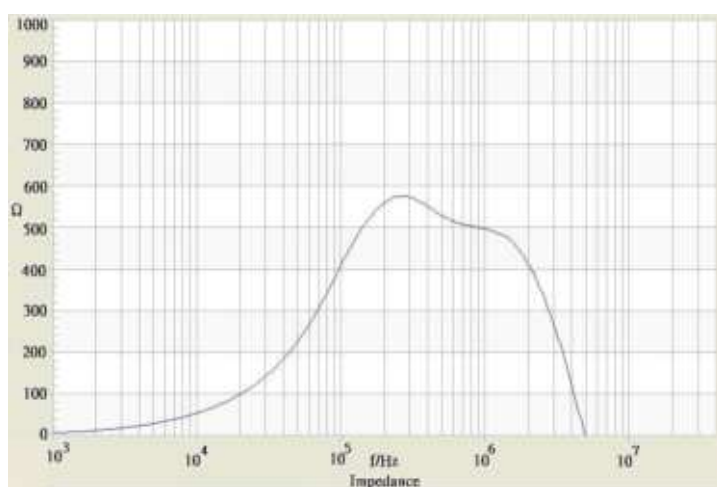

### Outline Dimensions

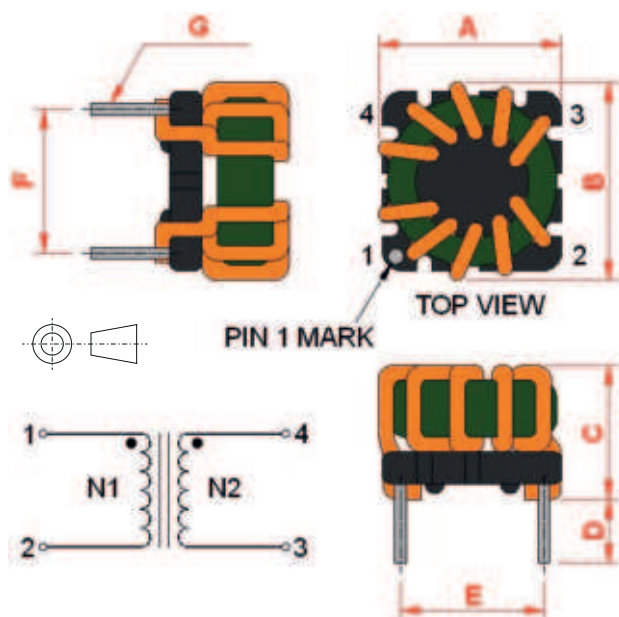

| Dimensions [mm] |                   |
|-----------------|-------------------|
| A               | 16.0 max.         |
| B               | 16.0 max.         |
| C               | 15.0 max.         |
| D               | 4.0 $\pm$ 0.3     |
| E               | 10.0 $\pm$ 0.3    |
| F               | 7.4 $\pm$ 0.3     |
| G               | $\varnothing$ 0.8 |

All specifications valid at +25°C, unless otherwise stated.